

Rumney Models LNER Diamond Freight Bogies

This set of instructions covers Rumney Models kits PG.11, PG.12A and PG.12B. These kits build into a pair of accurate and sprung 5'6" LNER diamond freight bogies. They consist of an etched bolster and sideframe backing along with cosmetic 3D printed sideframe overlays. The 3 kits can be summarised as follows:

- PG.11 - LNER 50T Bogie - Brick and Sulphate wagons
- PG.12A - LNER 42T Bogie with LNER platefront axleboxes - Quint Ds and Boplates
- PG.12B - LNER 42T Bogie with BR welded axleboxes - BR 1/472 Bogie Bolster Ds

The 42T and 50T bogies were similar but with the 50T version being deeper around the bolster, having more coil springs and larger axleboxes. The 42T version had distinctive rectangular section springs with only 1 visible on each bolster. The difference between PG.12A and PG.12B lies solely in the axleboxes printed on the sideframe. The BR welded axlebox had a pair of lugs as per the welded wagon axleboxes.

The etched part of the bogie is the same in principle so both types are covered together.



LNER 50T bogies (left) and LNER 42T bogies (right)

The bogies are designed to be built with sideframes that are sprung to the bolster. These are held in place by the spring wire, and they can be easily disassembled for easy removal of the wheels should the need arise. You will need 2mm top hat bearings to complete along with your choice of 3'1" wheels. Note that waisted type bearings are not suitable for these bogies as the cosmetic 3D printed parts of the sideframes rely on the bearing to align them.

Construction Notes

Read through the instructions first and familiarise yourself with the components. Drawings and photographs are included to attempt to make my waffle clearer.

3D Printed Parts

This kit includes high quality 3D printed parts. They are produced using the latest stereolithography technology to cure photosensitive resin. They have been thoroughly cleaned and then cured to produce the parts you have. As they are cured by a certain wavelength of light there is the possibility that if left exposed to light for a prolonged period of time the parts may go brittle. This is not unlike some plastics. To avoid this please consider the following:

- Do not leave unpainted resin parts exposed to direct sunlight for any length of time. Store in a dark place.
- Make sure all 3d printed parts are properly primed and painted.
- If the kit is not intended to be built for a while, consider priming the printed parts before storing.


If these points are followed, then the printed parts will be fine. However, if you leave them for several years on a south facing windowsill, then you might have end up having problems with them...

The printed parts are pushing the boundaries of what is currently possible with the printing technology. Whilst they have been road tested and tweaked for strength where necessary some still feature very thin walls and should therefore be handled with care. Parts have been removed from their supports, but they will need cleaning up. When cleaning them up please note the following:

- The material files/sands and cuts with a saw blade very easily, almost too easily. Go slowly and take care. When cleaning up, wet and dry paper is recommended, preferably with a little water to contain any dust. You can also use fine files.
- The material does not cut that well with a knife blade. Whilst not so brittle that it will crack as soon as look at it, it may fracture if you try and cut it with a blade. I can't imagine why anyone would want to try and slice the prints, but I thought I'd say it anyway. You can however use a sharp scalpel blade to pare away material if needed.
- Due to the process used to produce these parts they may need fettling to fit, i.e. parts may come out slightly oversize.
- Holes will almost certainly need opening out. Use a sharp drill.

Fixing the printed parts in place can be done using either cyanoacrylate (superglue) or epoxy glue. I have used both successfully. In both cases makes sure the printed parts and what they are being attached to are free from any grease. I have found that in both cases the glues can provide a good bond with the brass parts, so much so that the parts can break rather than the joint if you try to remove them. I put this down to the surface of the parts being not entirely smooth so there is something for the glue to key to.

The printed parts need no special cleaning before painting. A wash with a cream cleaner to remove any grease will be sufficient. Like plastics avoid using things such as cellulose thinners as this may damage them. IPA will be fine as this is what is used to clean them after printing.

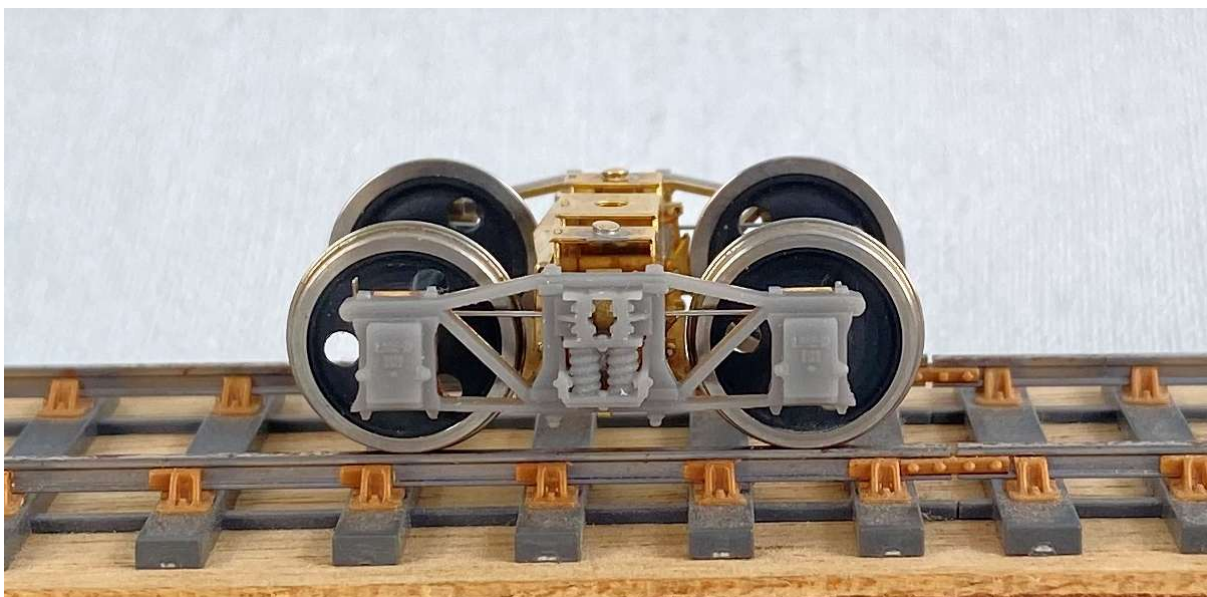

Etches

Check all holes before removing parts from the fret. The drawing process for etching if you use a CAD program as I do is extremely accurate but the actual etching process itself not an exact science. If the fret is slightly over etched, then there is no problem but if they are under etched the holes will need enlarging. I find that this is easiest to do before removing parts from the fret. The hole sizes will be noted at the appropriate points. Use an appropriate drill or a tapered reamer.

Remove one part at a time from the fret.

The instructions will assume that tags connecting parts to the fret will be cleaned up on removal of a part unless it is specified specifically in the instructions not to.

Very important:

All fold lines are through 90° with the fold line on the inside unless stated otherwise.

This means that when I say fold something up the folds should be made through 90° with the fold line on the inside. If the fold is to be done in any other way I will say so.

Everyone has their own soldering methods. I now use an Antex 50W temperature controlled soldering iron with predominantly 145° solder and La-Co paste flux.

Tools


The following tools may be useful when constructing the wagon:

- A selection of drill bits including 0.3mm, 0.7mm and 2mm along with something to hold them.
- A selection of tapered reamers in the range 0.3mm-2mm
- A smooth jawed vice and smooth jawed pliers
- A selection of fine needle files
- Something to remove the etches with; a piercing saw with fine blade (size 6/0 recommended) or a pair of cutters
- Wet and dry paper (800 or 1200 grade) for cleaning up the prints

Technical

The suspension is designed to use thin section steel wire (guitar strings). The exact size that you'll need will depend on the weight of the body. **0.012"** wire is included with the kit but you may wish to use a different size depending on the following information. Consider the weights as an ideal for each size of wire and adjust the wagon weight accordingly. The wire included in the kit is Ernie Ball plain steel guitar wire. These are available in single strings if you think you need to change diameter.

Wire diameter (thousands of an inch)	Wagon weight (grams)
11	50
12 (included)	75
13	100

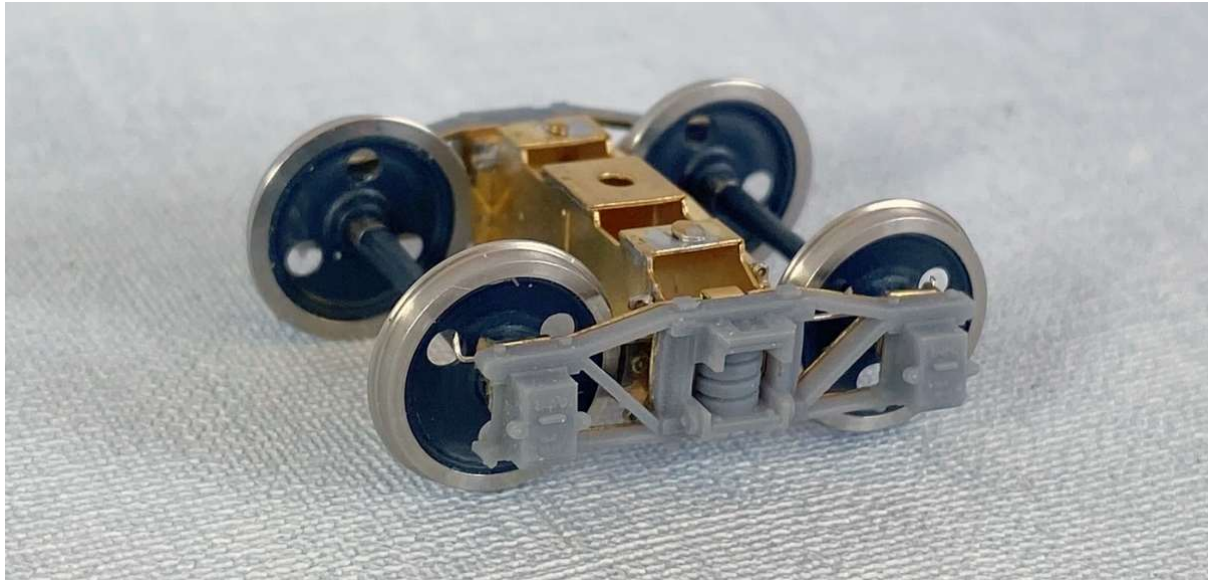

Materials list

You will need a few items to complete the bogies:

- M2 bolts and nuts.
- 2.5mm x 2mm tube for pivot sleeve (optional).
- Top hat pin point bearings (do not use waisted type bearings). Alan Gibson 4M63 are recommended.
- 3'1½" 3 hole disc wheels from your favourite manufacturer along with pinpoint axles.

M2 nuts and bolts along with tube for the pivot sleeve can be had from Eileen's Emporium amongst others and I'd recommend the bearings produced by Alan Gibson whatever type of wheel you use.

Eileen's Emporium (brass tube and wire)
www.eileensemporium.com

Alan Gibson (Workshop) (bearings)
www.alangibsonworkshop.com


Etched Parts:


- 1 - Bolster
- 2 - Sideframe
- 3 - Spacing washers (two thicknesses)
- 4a-4h - Brakegear detail
- 5 - Bogie pivot base
- 6 - Bogie pivot frame

The area shaded green on the parts diagrams is a bearing depth measuring jig for determining if the spacing washers are required and, if so, what thickness.

Other Parts:

- Spring wire (0.012"
- Lace pins
- 3D printed cosmetic sideframes

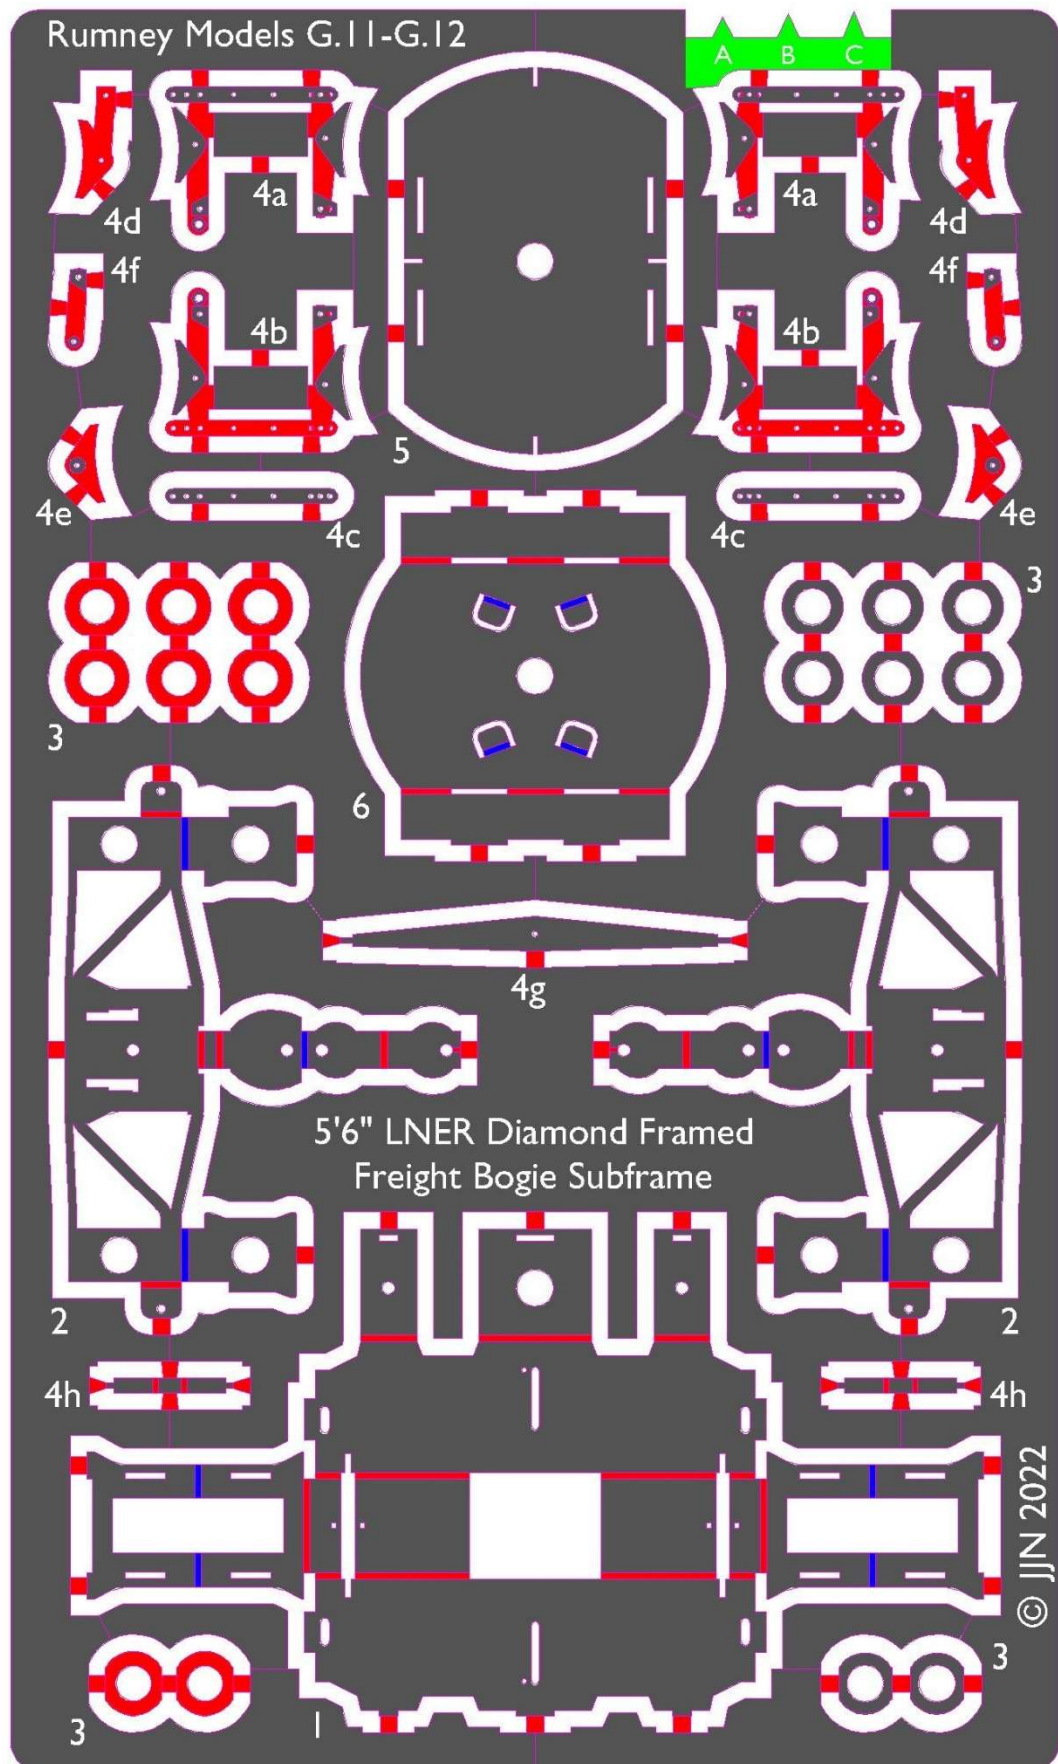

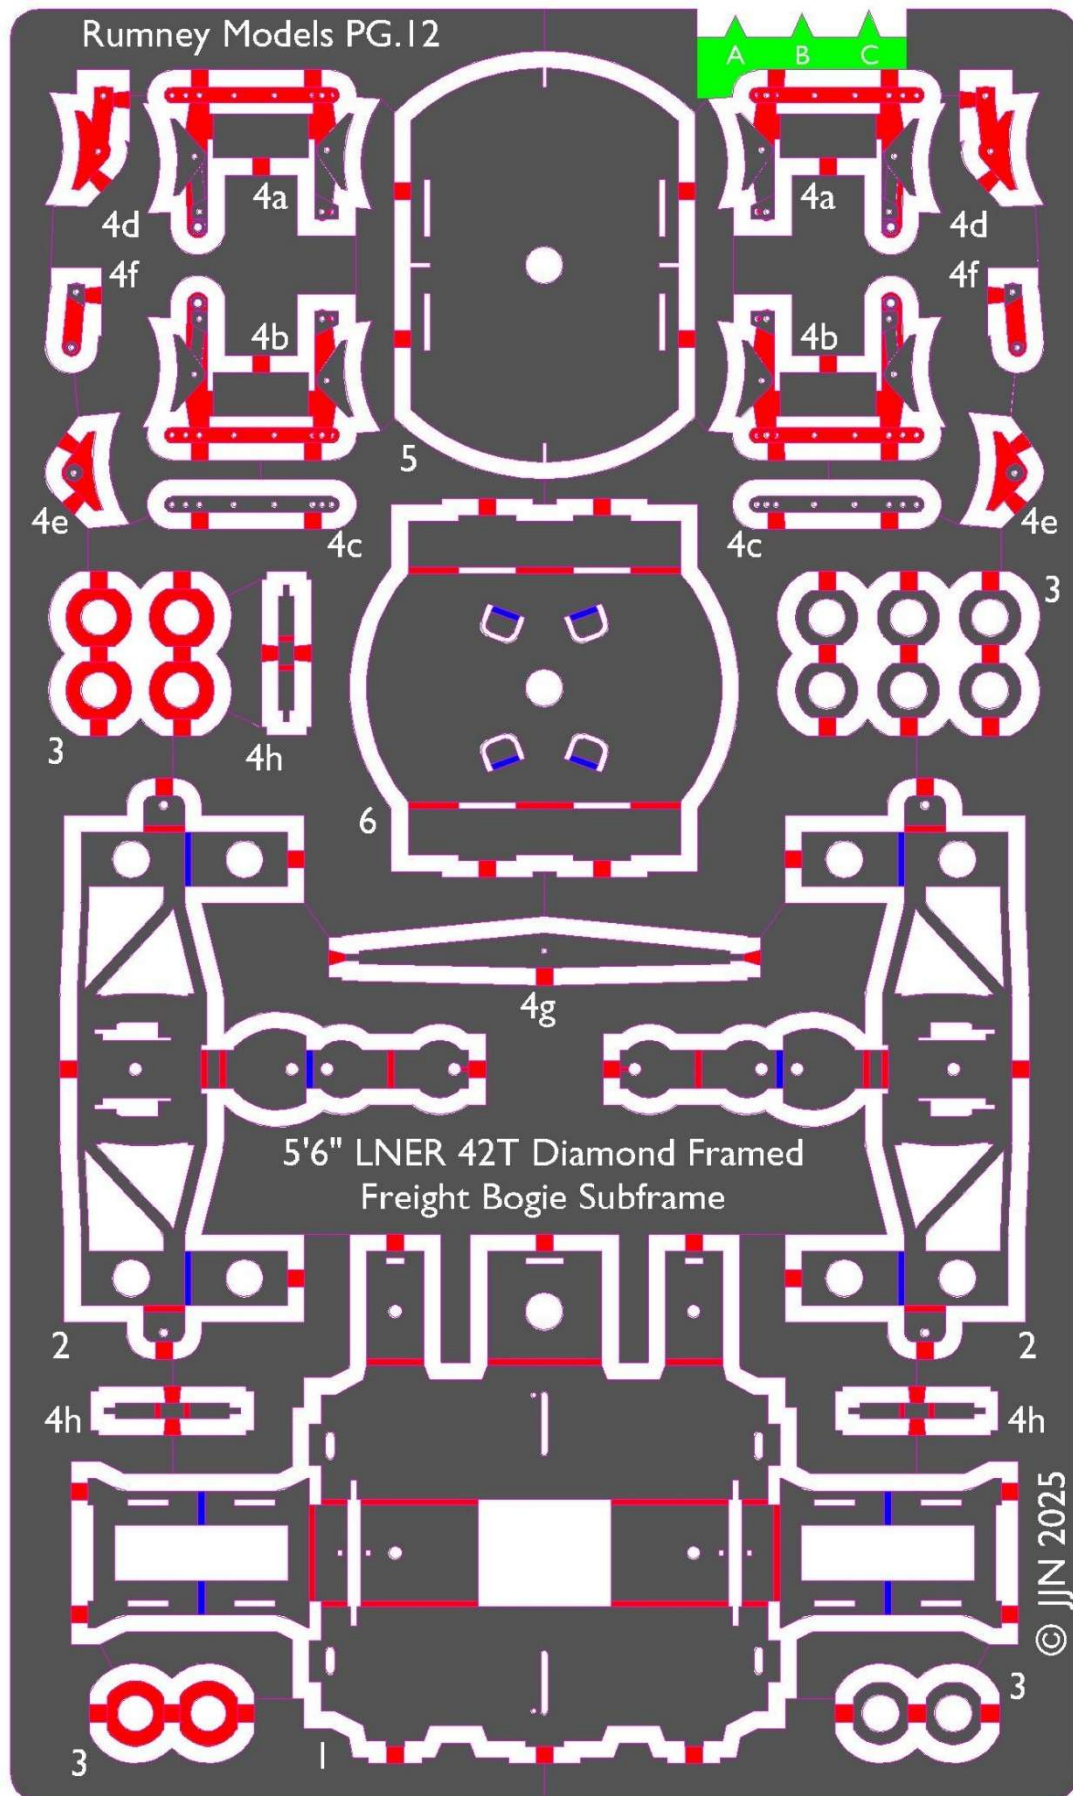

Construction

The images show in the following instructions are for the 50T type. They differ from the 42T type only in detail. The method of construction is the same for both, including the brakegear.

Bolster

Start with the bolster (1). Make sure that the two small holes can accept the 0.7mm shank of the lace pins and remove from the fret. Clean up any connecting tags.


The basic idea for the interface with the sideframes is a cam (which allows for a degree of rotational movement) sliding in a slot. A degree of care will be needed when assembling these parts to get a nice working fit as both parts are made from two layers of etch. Go slowly and carefully. Fold the ends of the bolster that will make up the slot through 180° with the fold line on the outside (see following picture). Make sure that the two faces are hard up against each other (use a pair of pliers at the fold line to make sure) and solder together along the outer edges. Be cautious with the amount of solder used so as not to get any in the slots for the locating tabs.




Once you are happy with both ends, fold up the sides of the bolster.



Then fold the ends up so that the slots engage with the tabs on the bolster sides. Solder the sides to the sides from the outside corner. Make sure the parts are hard up against each other and only use a little solder so you avoid getting any on the inside face of the ends between the bolster sides.

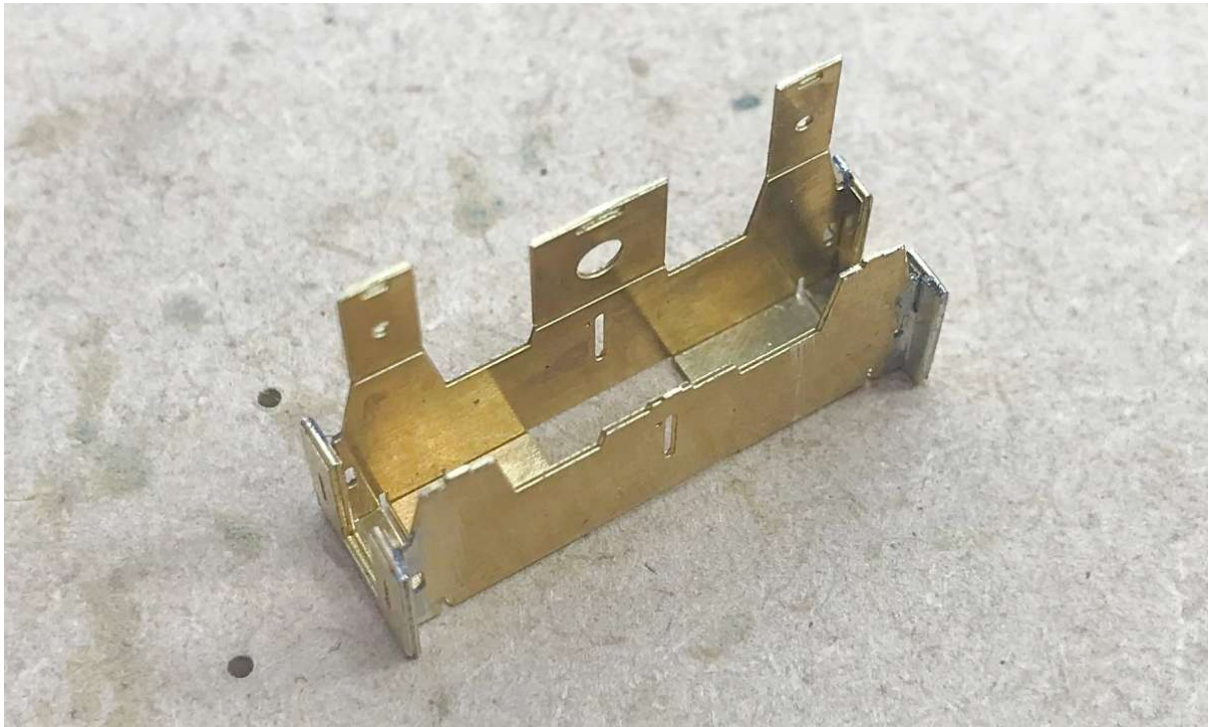


Fold over the three top parts so the tabs and slots engage, and solder in place. Solder the lace pins in place and then cut the shank of the pins so that only a little remains beneath the top. Retain the shank of the lace pins as this will be put to good use later.

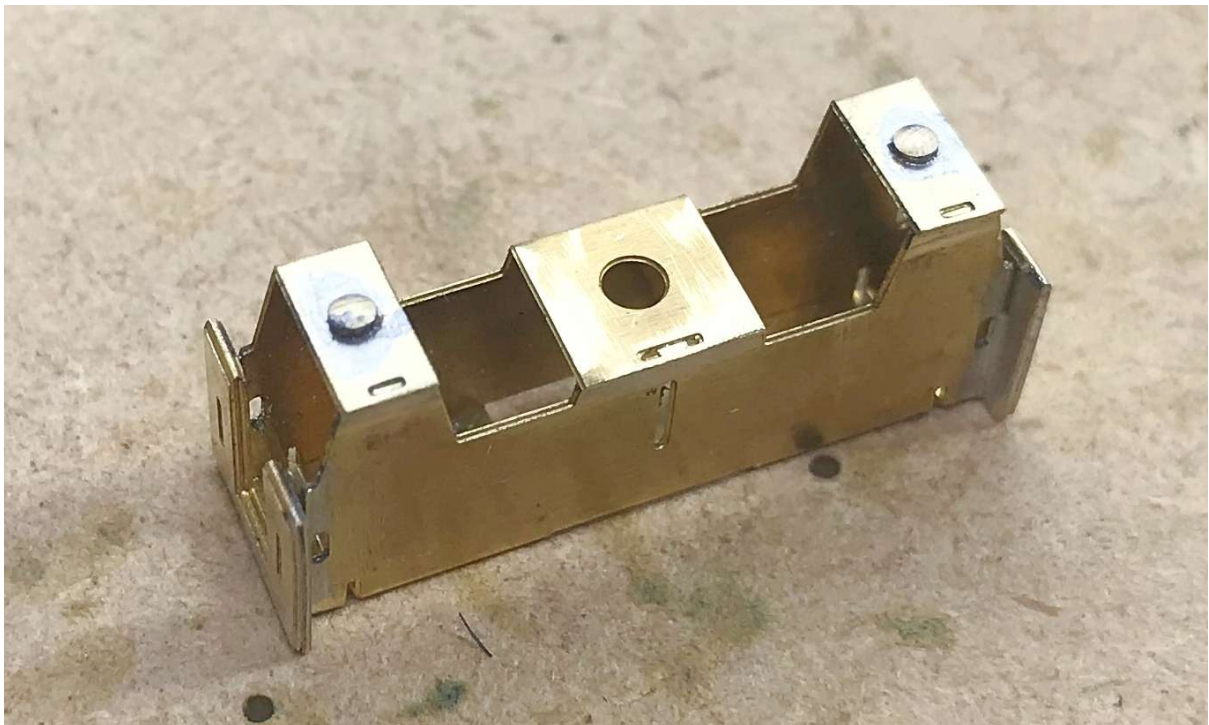

Next turn your attention to the brakegear detail (4a-4g). I have tried to create a proper representation of the brake shoes and associated hangers and links as it will be visible when viewed through the diamond frames. This means several layers. The parts are numbered working from back to front and everything is set out on the fret in mirrored copies, one for each side. The brakegear basically consist of two main layers, a back (4a) and a front (4b). If you don't want to bother with all the little detail pieces you can just use these two parts on each side.


Note that the link between the brake hangers on part 4a of the 42T version is half etched rather than full thickness.

Before any assembly, make sure that the holes shaded yellow in Fig.1 below can accept 0.31mm wire. This is the set on the left when viewing the fret from the side with the writing on. Remember the set on the right is a mirror of this.

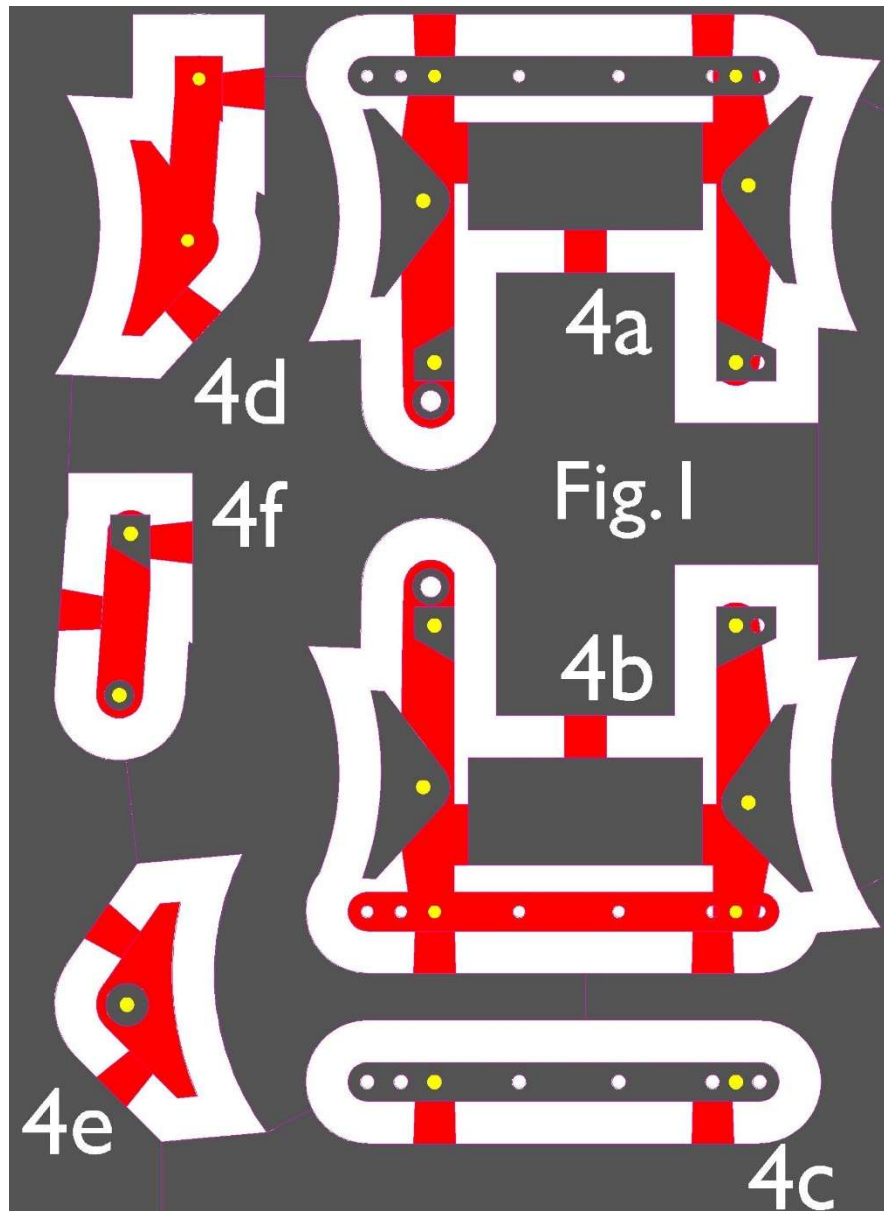


When assembling the brakegear do one set at a time so as not to mix up which side is which. In the images that accompany this section the set of brakegear on the right is the completed set which shows what we are aiming for. The set on the left shows the various stages.

Remove the back part (4a) from the fret. Use the part to drill 0.3mm holes into an off cut of wood or mdf through the holes that are shaded yellow in Fig.1 above and which you have already opened out. Do this with the half etched detail facing towards the wood as in the set on the left in the image below. Insert two short lengths of 0.31mm wire into the holes where the brake shoes are.

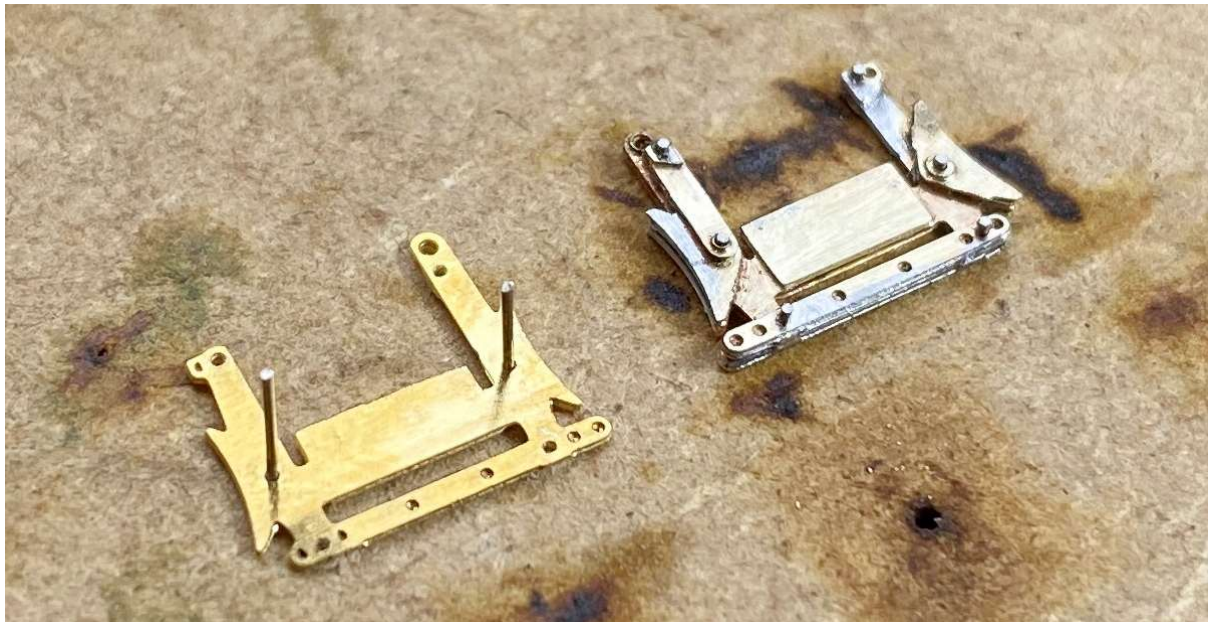

Place the front main layer (4b) on top of the back part using the two wires to align things. Insert 4 short lengths of 0.31mm wire into the remaining holes shaded yellow in Fig. 1 above and which you have already opened out.

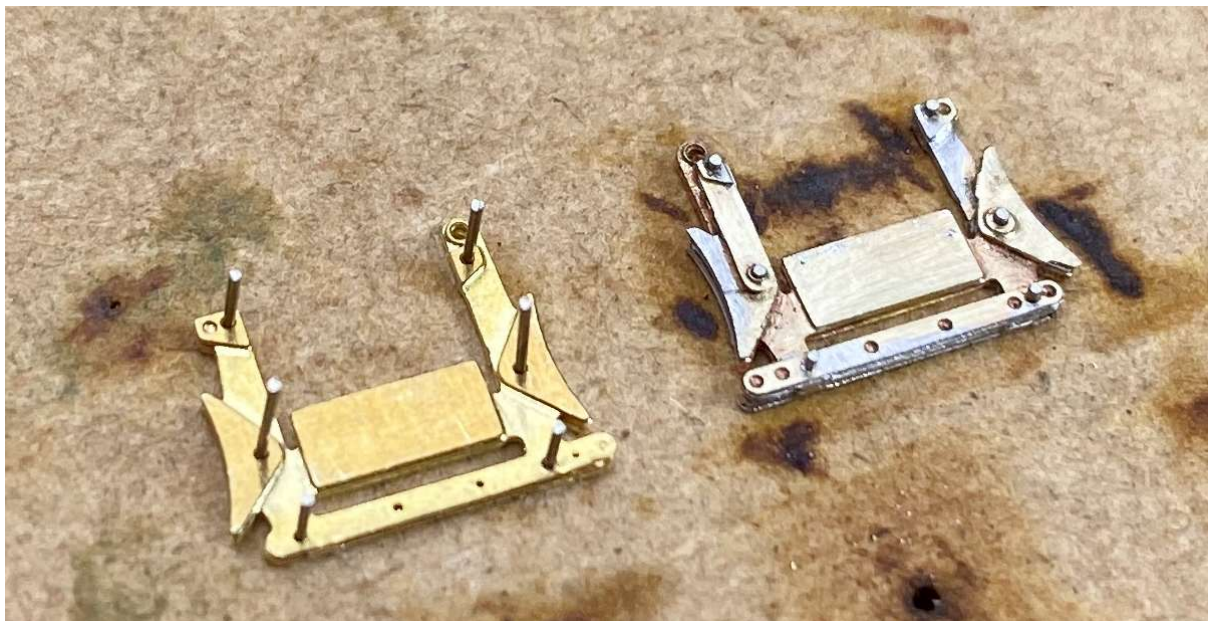

Next, add the pull rod detail (4c) and the brake shoe/hanger detail (4d). Note that part 4d goes on the side with the larger hole at the top of one of the hangers.




Finally, add the brake shoe detail (4e) to the opposite side to part 4d and the brake hanger detail (4f) on top of part 4d so everything looks like the set of parts on the right in the image above.

Solder everything together and trim the wire to resemble bolts. Carefully remove the brakegear from the jig and trim the wire on the back to resemble bolts.

Assemble the other set on the fret.

Fit the assembled brakegear to the bolster using the slots at the bottom to align things with the detail facing outwards. Solder in place.

Repeat for the other bolster.

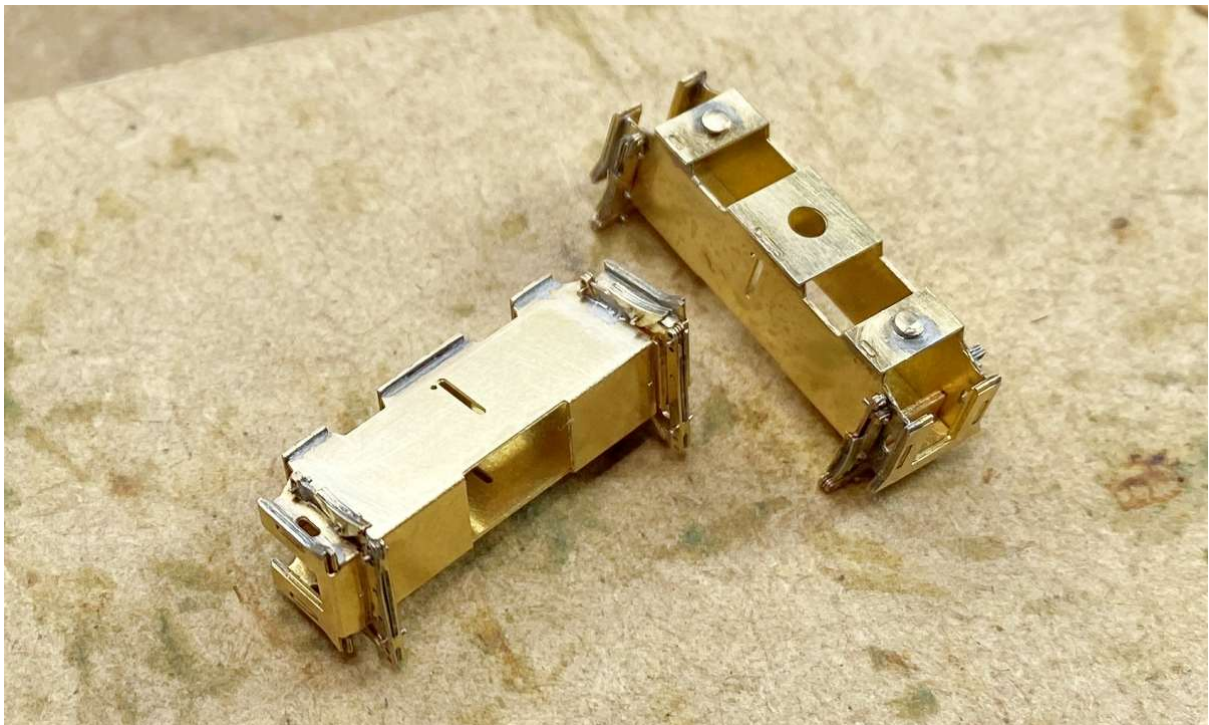

Add the brake yokes (4g) fitting the small tabs at either end into the large holes in the top of one set of hangers. This should be fitted so the flatter side is towards the bolster. Solder in place at the ends so that the yoke is roughly perpendicular to the side of the bolster. This yoke should go on the inside of the wagon when the bogie is fitted.



Remove the brakegear safety loops (4h) from the fret and fold into a C shape. Insert into slots in the bottom of the bolster and solder in place. See above image.

Functional Sideframes

Make sure the small holes on the sideframes (2), except those on the two small fold out tabs at the ends, can accept the shanks of the lace pins (0.7mm) and remove from the fret.




As mentioned before the functional part of the sideframes consists of a cam that fits into the slots in the sides of the bolster. The cam consists of three parts, two smaller and one larger which need to be folded up. Start with the fold line furthest from the main part of the side and fold through 180° with the fold line on the outside. Repeat for the next fold line. This will produce a sort of concertina effect. You will end up with the arrangement illustrated in the previous picture.


The next two fold lines either side of a short bar are through 90° and will trap the small parts of the cam against the sideframe.



Use the sideframe to drill a 0.7mm hole into a scrap piece of wood or mdf. Insert a length of the lace pin shank through the cam and into this jig. Solder the cam in place making sure the various parts are hard up against each other. Again, use only the minimum of solder and try and keep it from spreading along the sideframe (a paste flux maybe useful here).

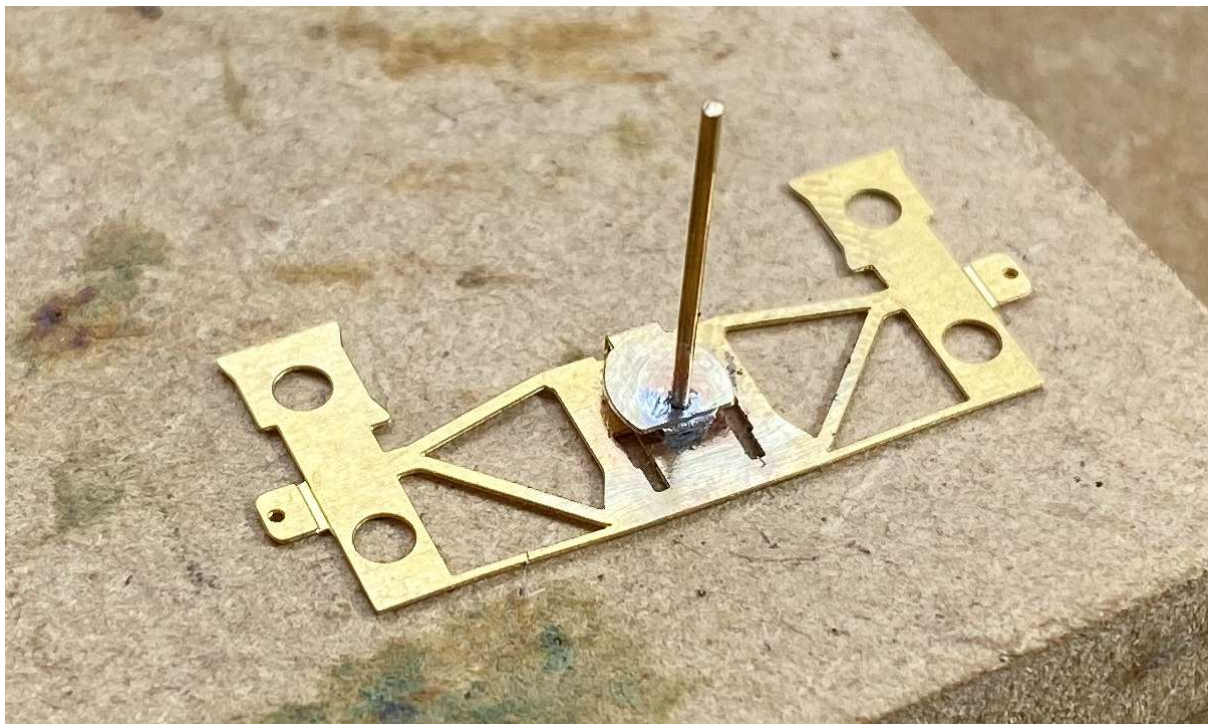

Fold the two parts that will represent the back flange of the journal through 180° with the fold line on the outside. Solder in place.

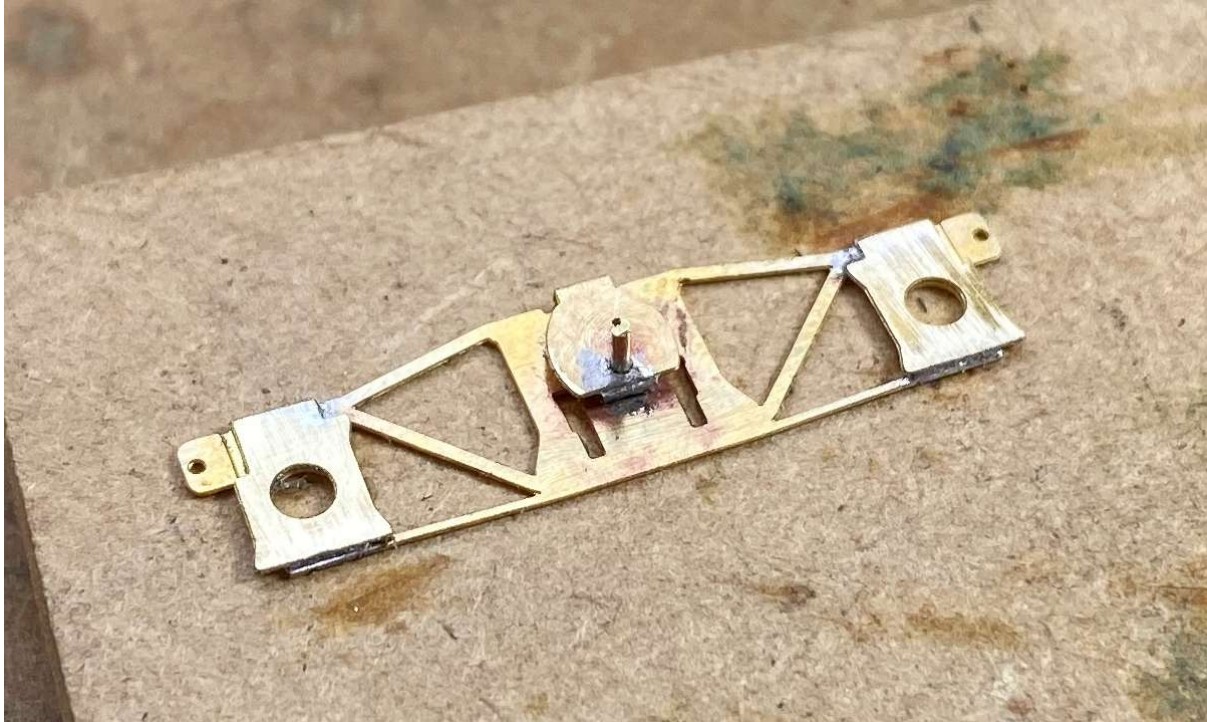

Fold up the two tabs at the ends which will become the fulcrum points for the spring wire and reinforce with solder.

Remove from the jig and trim the lace pin so that it is flush with the sideframe on both sides.


You will need to make sure the slot created in the cam is free from any solder. Use some fine wet and dry paper (1200ish) folded double to remove any remnants of solder. Offer the sideframe up to the slot in the bolster to check the fit. You may need to polish the outer surface of the bolster sides and perhaps deepen the slot in the cam a little using the wet and dry paper. The cam should be able to slide freely up and down in the slot but without any slop. Take your time getting a nice fit.

One thing I found is that you tend to end up with sideframes that fit in a specific slot and maybe loose or tight in the other slot. I didn't go so far as to label each sideframe with its corresponding slot but I did take care to keep each bogie separate so as not to mix up the sideframes too much.

Once you are happy with the fit of the sideframes in the bolster the top hat bearings can be fitted. When everything is assembled there should ideally be no lateral movement of the axle in the bearings and the points of the axles should run in the points of the bearings. The axles shouldn't push out the sideframes either, if they do the wheels probably won't rotate very freely and it will restrict movement of the sideframes.

In order to gauge whether you need any spacing washers (3) to take out any slop the kit comes with a measuring jig. This is the bit shaded green on the parts diagram. There are three triangles on the jig labelled A, B and C which measure the depth of the bearing. If the depth of the bearing corresponds to A (i.e. the back of the flange on the bearing sits against the flat part of the jig connecting the three triangles) then you will need a half etched washer on each bearing. If it corresponds to setting B then you will need a full thickness spacing washer and if it corresponds to C then you'll need a full thickness and a half etched washer. Don't assume that the depth of all bearings in a packet is the same. Check each one and use the appropriate washer.

To fit the bearings in place, use one of the sideframes to drill a pair of 2mm holes in a scrap piece of wood or mdf into which the bearings can fit. Locate the bearings in place along with any washers (these should go between the bearing flange and the sideframe) and solder in place. You may want to try and fit the sideframes along with the wheels at this point to check everything is ok before proceeding. Make sure the sideframes are at the same height on both sides when you do this by pushing them fully down in the bolster slots.

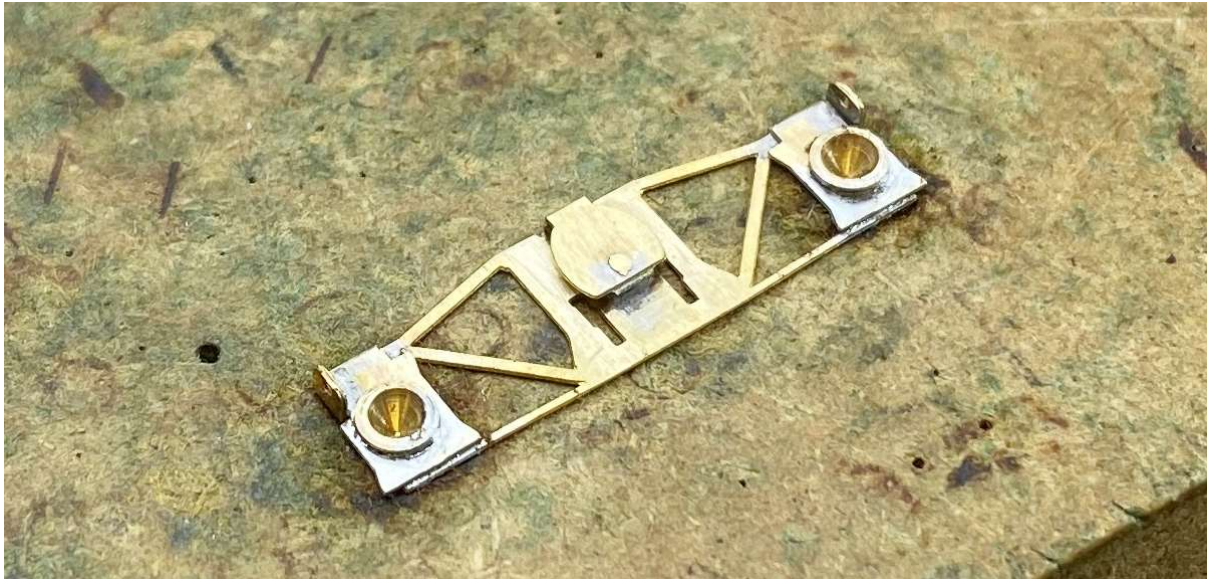

3D Printed Cosmetic Sideframes

You will need to clean up the remnants of the supports generated during printing. Use a fine file or wet and dry paper to do this. Use a little water with the latter to contain any dust. You will need to make sure the holes are opened out with a 2mm drill. Check that the holes are of a sufficient depth so that the cosmetic sideframe sits over the bearings and up against the etched sideframe.

Glue in place using epoxy or superglue. Before doing this, you could consider blackening the sideframes as it is recommended not to paint the functional parts of the bogie (there is a bit on painting later in the instructions) and if you do them at this stage you don't need to worry getting blackening fluid on the 3D prints. I didn't with the test builds but will in future.



Assembly

The sideframes and bolster are held together by the spring wire. On final assembly wire should be cut and bent to form an L shaped spring approximately 27mm x 2mm. The sideframes and bolster can be assembled and then the spring wire passed through the fulcrum tabs on the sideframe and through the slots in the bolster. Once in place the other end can be folded over to retain the wire.


Before bending over the retaining wire, you may want to just try test assembling the bogie with a long piece of wire (say half of that provided) and then paint/blacken it before final assembly.

I haven't mentioned fitting the wheels yet. I fitted mine after I'd assembled the bogie with the spring wires. I did this by twisting one side as far as it would go and twisting the other in the opposite direction which gave just enough room to fit the wheels. Alternatively, you can assemble the wheels at the same time as you put the bolster together and then add the spring wire. This is a bit of a three handed job though.



Location

The bogie is designed to be retained using an M2 bolt and the fret provides for a locating plate made up of two parts: a bogie pivot base (5) and a bogie pivot frame (6). Solder an M2 nut over the hole in the bogie pivot frame on the side with the two fold lines for the plates with tabs at the sides.

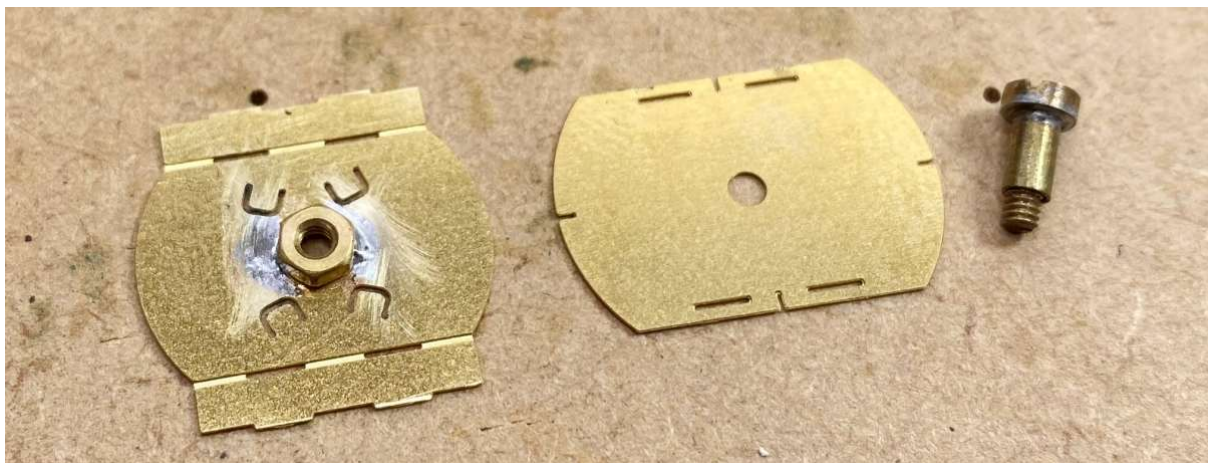

The sides of the bogie pivot frame can then be folded up along with the four little tabs that are designed to limit the movement of the bogie and solder to the bogie pivot base using the tabs and slots to locate the two parts. This unit can then be fitted to the underside of the wagon. The thread of the bolt will need to be 6mm long.

I dislike using the thread of a bolt as a bearing surface area so sleeved mine with a 4mm length of 2.5 x 2 mm tubing. If doing this, you will need to open out the hole in the top of the bolster to 2.5mm.



Ride Height

If the bogie pivot base is mounted directly to the body floor of the wagon, then the arrangement of the bolster should leave the wagon sitting about right. If the height is a bit low, it can be increased by adding packing pieces directly above the bearing pins on the bolster. Use scrap brass for this and set the height via the buffer centres. This should be about 13.8mm.

Couplings

Provision has been made for fitting AJs to the bogies. There is a pair of small holes etched into the bolster and a slot along the centre line. If you want working AJs then you will need to arrange the coupling so that it starts off heading towards the centre of the wagon before doubling back on itself and passing through the bolster in order to get sufficient length to allow it to uncouple.

Painting

It is recommended that the working parts of the bogie are chemically blackened rather than painted. The outside of the sideframes can then be primed and painted. If you wish to paint the entire bogie, then make sure you don't get any paint around the sideframe/bolster cam area.

Finally

Thanks must go to the Leslie Williamson who provided the drawings for the 50T bogie.

Justin Newitt - June 2025